


吊耳

不按比例

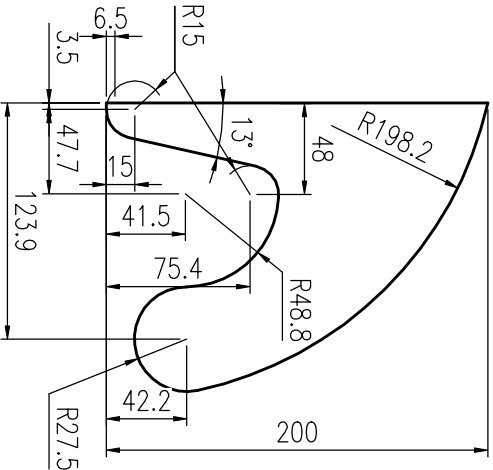

设备净重：~5393kg
运输总重：~9502kg

技术要求：

- 1.各部件沿可焊边焊牢，焊高为10mm或以下较薄件厚度为焊高，焊缝均为双面连续焊缝；
- 2.接头和装箱清单做塑封防水处理，粘贴在设备两侧显眼位置，需用防雨布及防护网包裹。
- 3.底板焊接：平焊断焊方式焊接，焊缝长度应≤150mm，间距应≤220mm，焊缝厚度应≥5mm；
- 4.吊耳焊接：立焊满焊焊接，焊缝厚度应≥12mm，宽度应≥20mm，确保焊缝均匀，无气孔和夹渣；
- 5.立柱与主梁焊接：采用平焊堆层方式焊接，首道为基础焊接，二道和三道呈45°角堆层。焊缝厚度和宽度应≥8mm；
- 6.横梁与主梁焊接：安装框架的顶部横梁时，横梁必须在呈立体“工”字时，再进行拼装与焊接。

注：包装还应符合以下文件要求

- A. 《青山蓝焰项目货物出口统一规定》
- B. 《青山蓝焰项目包装储运规定》

9	GB/T 706-2016	支臂梁 10[100×48×5.3	1	Q235B	/	240	总长24000
8	GB/T 706-2016	底板 5900×4000×4	1	Q235B	/	741	
7	GB/T 706-2016	吊耳 200×150×30	4	Q235B	4.55	18.2	
6	GB/T 706-2016	筋板 200×200×12	28	Q235B	3.77	105.5	
5	GB/T 706-2016	斜撑Ⅱ 10[100×48×5.3 L=3330	10	Q235B	33.3	333	
4	GB/T 706-2016	斜撑Ⅰ 10[100×48×5.3 L=3225	4	Q235B	32.2	64.4	
3	GB/T 706-2016	立柱 181 I字钢 80×94×6.5 L=3140	14	Q235B	75.8	1061	
2	GB/T 706-2016	横梁 181 I字钢 80×94×6.5 L=4000	10	Q235B	96.6	966	
1	GB/T 706-2016	主梁 181 I字钢 80×94×6.5 L=6000	4	Q235B	145	580	
件号 PART NO.	图号或标准号 DRAWING NO. OR	名 称 DESCRIPTION	数量 QTY.	材 料 MATERIAL	单 重 SINGLE WEIGHT(kg)	总 重 TOTAL WEIGHT	备 注 REMARK
版次	修 改 内 容	日期	修改	校对	审核		



江苏索普赛瑞装备制造有限公司

JIANGSU SOPO-CERE EQUIPMENT MANUFACTURING CO., LTD.

设计 DESIGN

校对 CHECK

标准化审查 S.T.D

审核 REVIEW

批准 RATIFY

省煤器3A进口接管

省煤器3A出口接管

集汽集箱

运输图

项目名称

ENTRY NAME

青山蓝焰项目

设计阶段 DESIGN PHASE

比例 SCALE

第 1 张 SHEET

图 号

DWG NO.

施工图

1: 4:5

共 1 张 TOT.

BZ15SCG2402-1-6-0

版本 REV.

0

本图纸及相关文件版权归属于江苏索普赛瑞装备制造有限公司所有,任何单位或个人未经江苏索普赛瑞装备制造有限公司书面许可,不得以任何方式复制或扩散至第三方,违者应承担法律责任。

THIS DRAWING AND RELEVANT DOCUMENTS COPYRIGHT BELONGS TO SOPO CERE EQUIPMENT MANUFACTURING CO., LTD. THEY MAY NOT BE REPRODUCED OR DISCLOSED TO ANY THIRD PARTY IN ANY FORM WITHOUT THE PRIOR WRITTEN PERMISSION OF SOPO CERE EQUIPMENT MANUFACTURING CO., LTD. THE OFFENDERS SHALL BEAR THE CORRESPONDING LEGAL RESPONSIBILITY.